


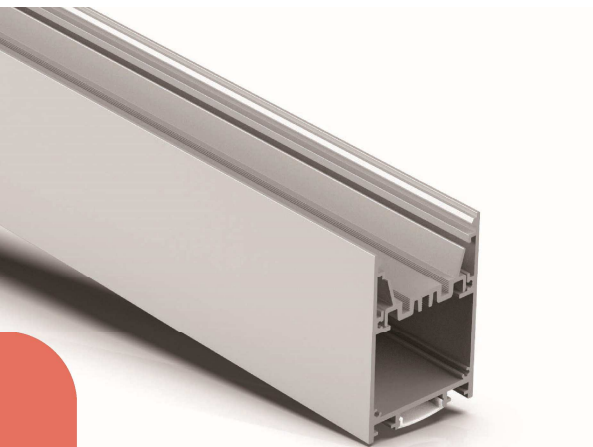




Profilé Aluminium



P50N



LW-P50N



Specification:

Adapté au PCB 18mm

Max. Puissance de la LED: 57.6w/m

Installation: Surface / Suspendu

Matériaux: Extruded Aluminium 6063

Finition: Anodisé argenté, noir ou blanc *

Diffuseur: Diffuseur PMMA flexible, peut être un rouleau de 25m

Longueur : 2000mm or 2500mm en continu **

Taille : Profil (W) 50mm, (H) 75mm

Installation des pilotes: Pilote distant ou intégré requis

* Couleur de revêtement en poudre personnalisée sur demande. Frais supplémentaires s'appliquent

** Profilé vendu au mètre. Peut être coupé à n'importe quelle longueur jusqu'à 6000 mm



Diffuseur PMMA (Bas)

Code: P50N-O (Opale, lumière trans. >63%)

Code: P50N-N (Nouveau Opale, lumière trans. >74%)



Diffuseur PMMA (Haut)

Code: P50N-O (Opale, lumière trans. >60%)

Code: P50N-N (Nouveau Opale, lumière trans. >74%)




Diffuseur NOIR

Code: E50-B (Noir, lumière trans. >22%)

MOQ: 200M

Accessoires d'installation:

	Capot en Aluminium sans vis (Sans trou) Code: P50N-Cap-N		Kits de suspension Code: Sus.KitsB
	Attache en métal Code: P50N-Clip-M		Attaches Murale Code: WClip
	Support L en Acier Inox Code: LW-LMB		Joins 90°A Code: J-90A
	Joiners 90°B Code: J-90B		Joiners 120°A Code: J-120A
	Dali/Push Conducteur LED Gradable 30/36/60/100W Code: LW-SCD		Joiners 180°A Code: J-180A
	Alimentation LED standa 20/30/36/45/60W Code: LW-HLD		Joiners 120°B Code: J-120B
	Gear Tray Clip Code: P50N-Clip		

