


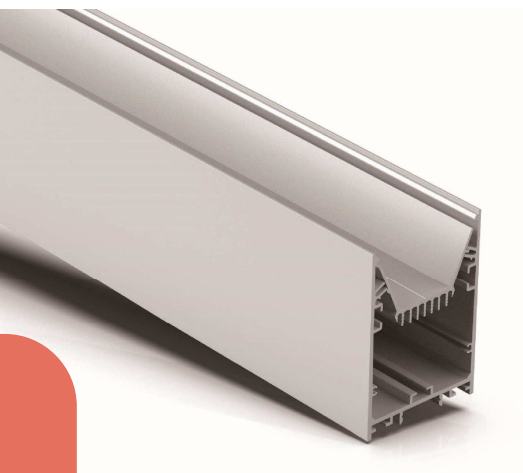


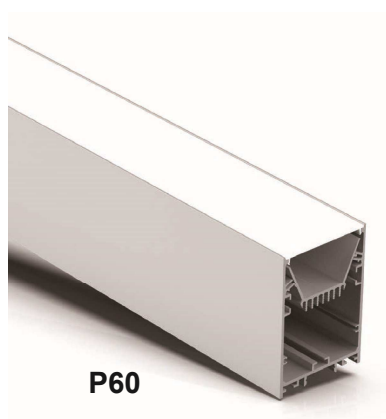

Profilé Aluminium



P60

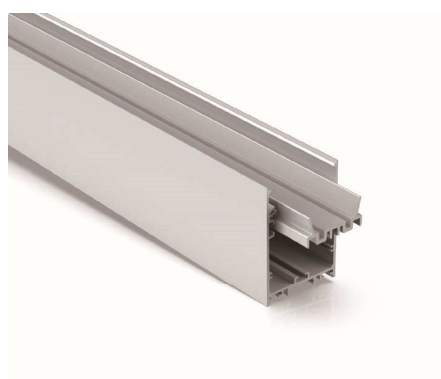

LW-P60



Specification:

Adapté au PCB 28mm

Max. Puissance de la LED: 57.6w/m

Installation: Surface / Suspendu

Matériaux: Extruded Aluminium 6063

Finition: Anodisé argenté, noir ou blanc *

Diffuseur: Diffuseur PMMA flexible, peut être un rouleau de 25m

Longueur : 2000mm or 2500mm en continu **

Taille : Profil (W) 50mm, (H) 75mm

Installation des pilotes: Pilote distant ou intégré requis

* Couleur de revêtement en poudre personnalisée sur demande. Frais supplémentaires s'appliquent

** Profilé vendu au mètre. Peut être coupé à n'importe quelle longueur jusqu'à 6000 mm



Diffuseur PMMA (Bas)

Code: P60N-N (Nouveau Opale, lumière trans. >74%)



Diffuseur PMMA (Haut)

Code: AS3-O (Nouveau Opale, lumière trans. >74%)

Accessoires d'installation:

	Embout en Aluminium (Sans trou) Code: P60-Cap		Kits de suspension Code: Sus.KitsB
 (Optional)	Bouchon en Aluminium CNC (Sans trou) Code: P60-Cap-N	 (Optional)	Attaches Murale Code: WClip
 (Optional)	Joins 180°A Code: J-180A	 (Optional)	Joins 90°A Code: J-90A
 (Optional)	Joins 90°B Code: J-90B	 (Optional)	Joins 120°A Code: J-120A
 (Optional)	Dali/Push Conducteur LED Gradable 30/36/60/100W Code:LW-SCD	 (Optional)	Joins 120°B Code: J-120B
 (Optional)	Alimentation LED standard IP67 20/30/36/45/60W Code: LW-HLD		

