



SC-2835HE-PXX



This is a watermark for the trial version, register to get the full one!

Benefits for registered users:

- 1.No watermark on the output documents.
- 2.Can operate scanned PDF files via OCR.
- 3.No page quantity limitations for converted PDF files.

Remove Watermark Now

1.2~5 assembled LEDs

2.High definition, high lumen, up to 170lm/w.

3.Cut 4pcs LEDs for 12V DC, cut 8pcs LEDs for 24V DC;

4.3M VHB adhesive tape for easy installation (2835HE-PX3 with 3M 300LSE tape) ;

5.Standard 5M on reel for 2835HE-PX and 2835HE-PX2, 3M on reel for 2835HE-PX3;

6.2835HE-PX3 series should work with aluminium profile.

7. ETL,CE,RoHS, 3 years warranty;

8. Different waterproof grade can meet requirements in different environments;

Application:

1. Stage lighting
2. Festival,activities,exhibition lighting,etc
3. Backlight of signage
4. Contour lighting
5. LED luminous characters
6. Landscape decoration lighting



Technical parameters:

Model	Colour	Lumen	LEDs Type	LEDs Qty.	Beam angle	DC voltage	Rated power	IP	CRI
SC-2835-PX	White	1025	2835	32	120	12/24	5.8	20/64/ 65/68	80
	Warm white	952							
	Neutral White	996							
SC-2835HE-PXX2	White	2033	2835	64	120	12/24	11.5	20/64/ 65/68	
	Warm white	1897							
	Neutral White	2002							
SC-2835HE-PXX3	White	3868	2835	120	120	12/24	21.6	20/64	
	Warm white	3612							
	Neutral White	3695							

This is a watermark for the trial version, register to get the full one!

Benefits for registered users:

- 1.No watermark on the output documents.
- 2.Can operate scanned PDF files via OCR.
- 3.No page quantity limitations for converted PDF files.

Remove Watermark Now

	SC-2835HED-PX	IP64	Slim PU glue potted	
	SC-2835HEP-PX		PU glue potted	
	SC-2835HES-PX		Silicon sleeved	
	SC-2835HEP-PX2	IP68	Silicon extrusion and glued	
	SC-2835HEP-PX2	IP64	Silicon extrusion and glued	
	SC-2835HE-PXX2	IP65	PU glue potted	
	SC-2835HES-PX2		Silicon sleeved	
	SC-SF-2835HE-PX2	IP68	Silicon extrusion and glued	
SC-2835HE-PXX3	SC-2835HED-PX3	IP64	Slim PU glue potted	

Accessories :


Model	SC-C1-8/10	SC-C2-8/10	SC-C3/10	L-connector	T-connector	CON-1-8/10	CON-2-8/10	CON-3-8/10
SC-2835HE-PX	✓	✓	✓			✓	✓	✓
SC-2835HE-PXX2	✓	✓	✓			✓	✓	✓
SC-2835HE-PXX3	✓	✓	✓			✓	✓	✓




Dimension:

Unit:mm/inch

SC-2835HE-PX-12V

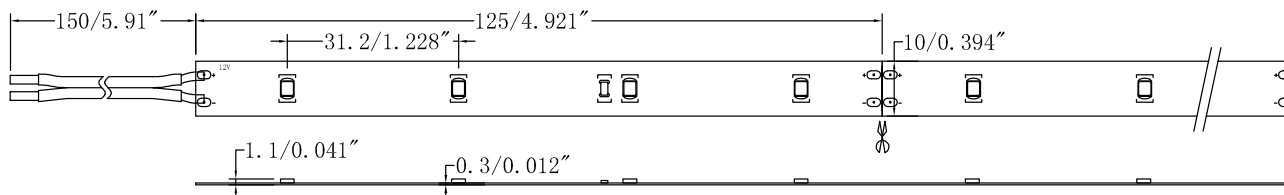

SC-2835HE-PX-24V

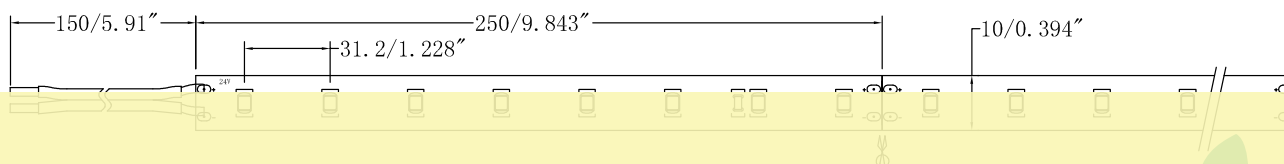


This is a watermark for the trial version, register to get the full one!

Benefits for registered users:


- 1.No watermark on the output documents.
- 2.Can operate scanned PDF files via OCR.
- 3.No page quantity limitations for converted PDF files.

Remove Watermark Now


SC-2835HE-PXX2-12V

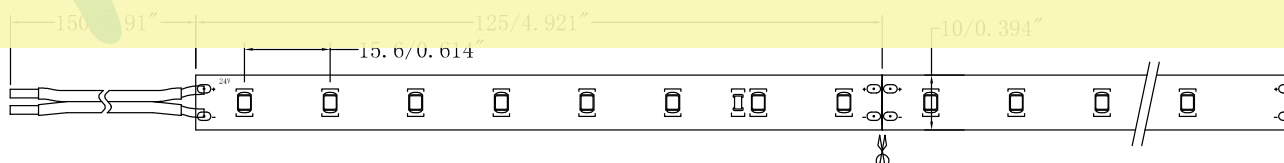

SC-2835HE-PXX3-12V

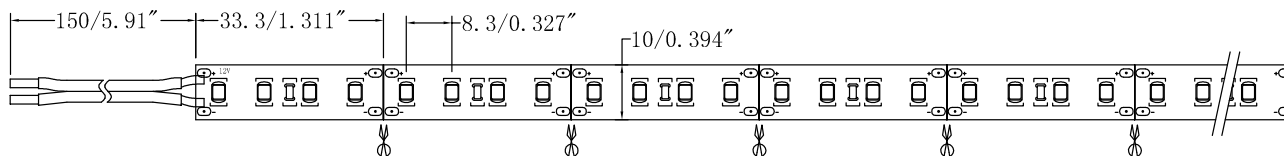


SC-2835HE-PXX3-24V

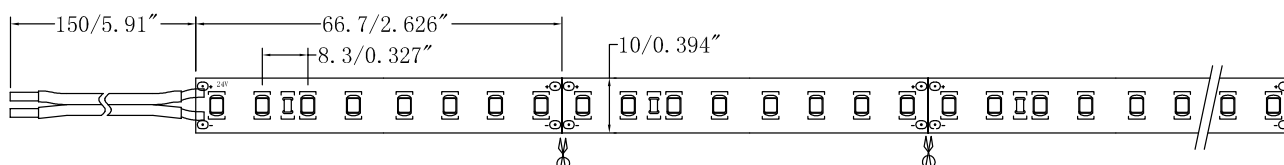



Connection diagram :

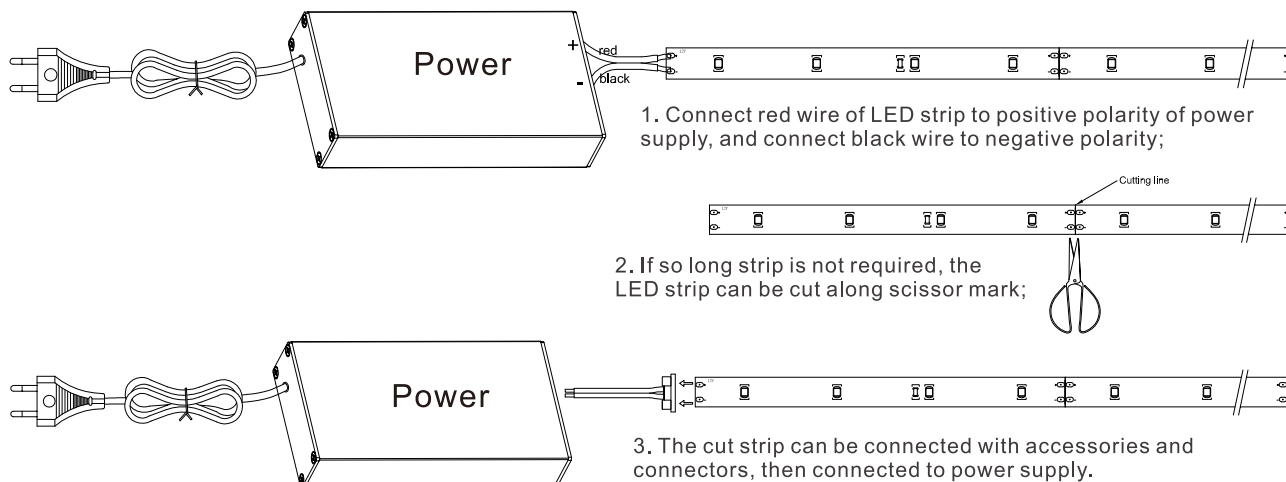

Packing instruction:

This is a watermark for the trial version, register to get the full one!

Benefits for registered users:

- 1.No watermark on the output documents.
- 2.Can operate scanned PDF files via OCR.
- 3.No page quantity limitations for converted PDF files.

Remove Watermark Now

Packing box

Anti-static bag

LED strip+accessories

Installation requirement:

- 1.The LED strip and accessories can't be squeezed or folded;
- 2.PCB conductive parts can't be damaged when installation;
- 3.Installation must conform to electrical safety standard. The LED strip can only be installed by professionals;
- 4.Ensure power supply transform operating load with transformer;
- 5.When install on metal or conductor surface, insulation protection need to be provided to the contact area;
- 6.Observe positive and negative polarity, ensure correct connection to avoid damaging LED strip;
- 7.When installation, please prevent static electricity;
- 8.The product need anti-corrosion environment, such as, avoiding damp, water drop or other adverse elements.

2018.06.12