

Série AREA LIGHT

100 watts	150 watts	200 watts	240 watts	300 watts	130 lm/watt	150x75°	120x120°	150x60°	145x85°	IRC > 80	
IK10	IP65	SMD 2835	PF > 0.9		120 - 277 Vac	DLC certifié	L80/B10 à 25°	50 000 heures	utilisation -40 / +40°	EN62471 -RG0-	

garantie 5 ans	RoHS compliant



Durée de vie : **L80/B10 à 25°**
Efficacité lumineuse : **130 lm/watt**
Facteur puissance : **> 0.9**
THD : **< 25%**

130
lm/watt

Durée de vie : L80/B10
(50 000 hrs à 80% du flux minimum,
10% maxi. des LED hors service. Test
à 25°)

EN62471 : RG0
Risque photobiologique : Risque 0

IMPORTANT

Commandez simultanément
votre **AREA LIGHT** et
ses accessoires !



- 100 watts -

- 150 & 200 watts -

- 240 & 300 watts -



LES ACCESSOIRES D'INSTALLATION (à commander séparément)

MÂT CARRÉ 100-150 mm
accessoire fixe
ref : **ARL-ACC01**



MÂT CARRÉ 100-150 mm
accessoire ajustable
ref : **ARL-ACC02**



ETRIER UNION
fixation murale
ref : **ARL-ACC05**



MÂT ROND Ø60 mm
accessoire ajustable
ref : **ARL-ACC03**



MÂT ROND >Ø100 mm
accessoire ajustable
ref : **ARL-ACC04**




ETRIER EN «U»
fixation sol ou mur
ref : **ARL-ACC06**




Série AREA LIGHT

100 watts	150 watts	200 watts	240 watts	300 watts	130 lm/watt	150x75°	120x120°	150x60°	145x85°	IRC > 80	
IK10	IP65	SMD 2835	PF > 0.9		120 - 277 Vac	DLC certifié	L80/B10 à 25°	50 000 heures	utilisation -40 / +40°	EN62471 -RG0-	


garantie 5 ans	RoHS compliant



AREA LIGHT 100 watts







AREA LIGHT 150 & 200 watts



AREA LIGHT 240 & 300 watts





Référence	Angle	Efficacité	Puissance	Lumens en 4000K	Lumens en 3000K	Poids
AL100AW30KD30 ou 40K	150x75°	130 lm/w	100 watts	12 523 lm	11 450 lm	5.0 Kg
AL150AW30KD30 ou 40K			150 watts	20 517 lm	18 362 lm	7.3 Kg
AL200AW30KD30 ou 40K			200 watts	26 350 lm	22 783 lm	
AL240AW30KD30 ou 40K			240 watts	33 035 lm	29 538 lm	8.5 Kg
AL300AW30KD30 ou 40K			300 watts	37 500 lm	36 000 lm	



COMPRENDRE NOS RÉFÉRENCES :
AL300AW30KD30

AL : Area Light
300 : 300 watts
AW : 120-277 Vac
30K : blanc chaud 3000K
D : gamme standard
30 : Eclairage 150x75°

DIFFÉRENTS TYPES D'ÉCLAIRAGE

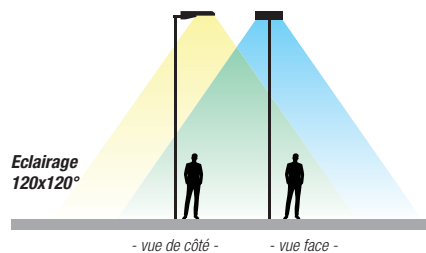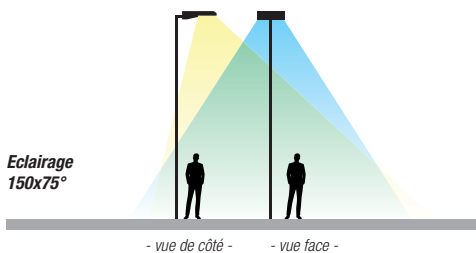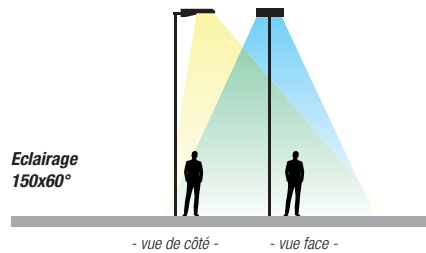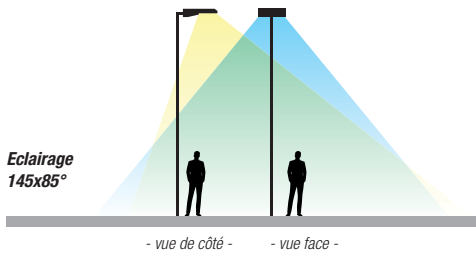

- 4 TYPES D'ÉCLAIRAGE -

